


CWS09CP

IMPORTANT: Measure project dimensions starting from the glass edge.




ALWAYS REFERENCE DIMENSIONS
TO ENSURE ACCURACY

*Not shown to scale.

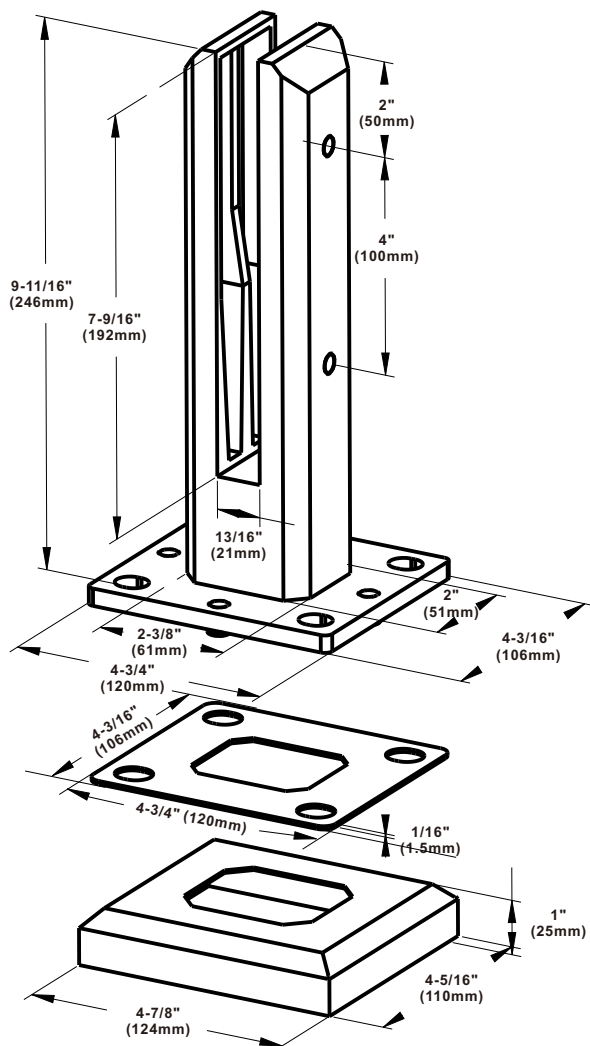

Item Number	Glass size
CWS09CP	1/2" (12mm) - 9/16" (14mm)

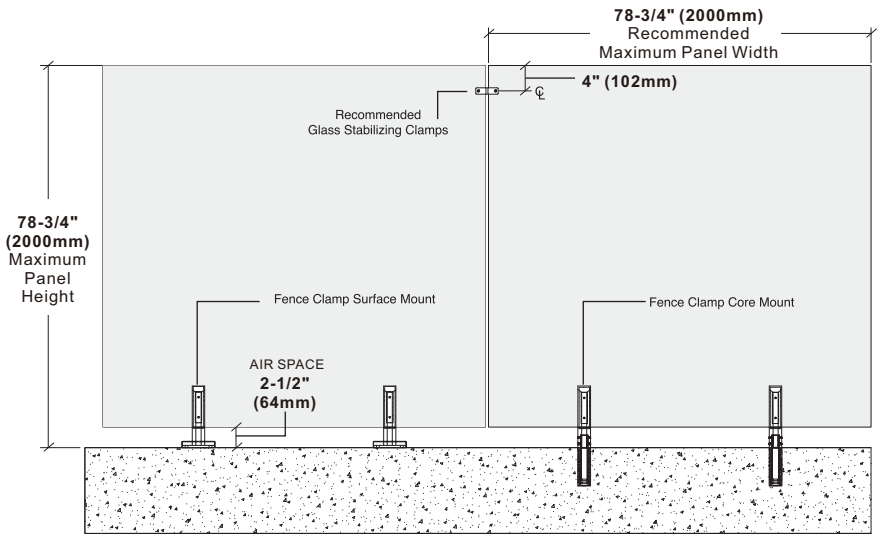

***IMPORTANT:** Measure project dimensions starting from the glass edge.

***Not shown to scale.**

Specifications:

Includes: Gaskets, screws, and template
Construction: 2205 Stainless Steel

Glass Sizes: 1/2" (12mm) to 9/16" (14mm) thick tempered safety glass

Maximum Glass Capacities for Two Post

Maximum panel height: 98-7/16" (2500mm) - 110-1/4" (2800mm)
Maximum panel width: 98-7/16" (2500mm) - 118-1/8" (3000mm)

Weight bearing capacity: 1763 lbs. (800kg)
Side column force: 882 lbs. (400kg)

Recommendations:

To ensure public safety, we strongly advise using only tempered safety glass. Not for guardrail applications.

UNIKOO LIMITED WARRANTY:

- UNIKOO warrants its commercial hardware for a period of 1 year from the date of purchase. UNIKOO commercial hardware is warranted against material and workmanship defects.
- All warranty claims are subject to inspection by UNIKOO before providing a resolution against the warranty claim.
- This warranty is void if it is determined after UNIKOO inspection that the Hardware has been improperly installed and/or maintained in a manner not conforming to UNIKOO guidelines and instructions provided at time of purchase.
- UNIKOO's responsibility to provide a resolution under said warranty will be limited to a refund of purchased price or provide a replacement for the hardware.
- The refund or replacement will constitute UNIKOO's limited liability and obligation for any and all defective material/workmanship for said warranty claim.
- THIS WARRANTY IS EXCLUSIVE AND UNIKOO MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED.