




\*Not shown to scale.

### 8-7/8" Square Surface Mount Post Clamp For Bevel Stairs With Base Cover

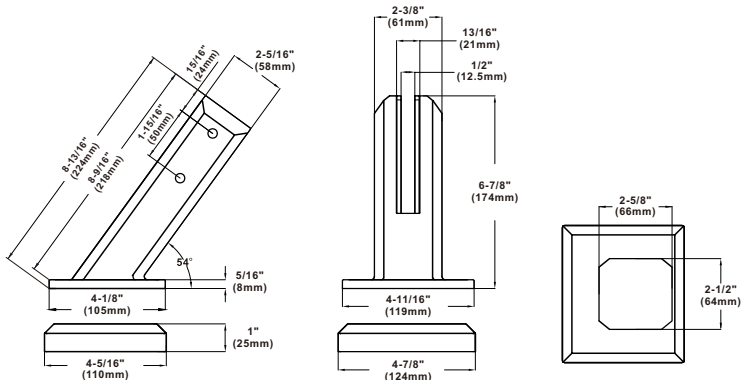

#### Specifications:

**Glass Sizes:** 1/2" (12mm) thick tempered safety glass

**Construction:** 2205 Stainless Steel

**Includes:** 1 gasket, 1 cover plate, 1 steel plate, and 1 main body

#### Maximum Glass Panel Capacities for Two Posts

**Maximum Glass Panel Width (Not to exceed) :** 70-7/8" (1800mm)

**Maximum weight per 2 posts:** 176 lbs. (80kg)

**Maximum Glass Panel Height (Not to exceed) :** 43-5/16" (1100mm)

#### Description:

Screw accessories are metric.

Adjustable angle range: 35° to 45°.

Ambidextrous design for universal staircase installation.

#### Recommendations:

To ensure public safety, we strongly advise using only tempered safety glass.

#### UNIKOO LIMITED WARRANTY:

- UNIKOO warrants its commercial hardware for a period of 1 year from the date of purchase. UNIKOO commercial hardware is warranted against material and workmanship defects.
- All warranty claims are subject to inspection by UNIKOO before providing a resolution against the warranty claim.
- This warranty is void if it is determined after UNIKOO inspection that the Hardware has been improperly installed and/or maintained in a manner not conforming to UNIKOO guidelines and instructions provided at time of purchase.
- UNIKOO's responsibility to provide a resolution under said warranty will be limited to a refund of purchased price or provide a replacement for the hardware.
- The refund or replacement will constitute UNIKOO's limited liability and obligation for any and all defective material/workmanship for said warranty claim.
- THIS WARRANTY IS EXCLUSIVE AND UNIKOO MAKES NO OTHER WARRANTY, EXPRESSED OR IMPLIED.

# CWS22CP

**IMPORTANT:** Measure project dimensions starting from the glass edge.



\*Not shown to scale.

## 8-7/8" Square Surface Mount Post Clamp For Bevel Stairs With Base Cover

Item Number	Glass Thickness
CWS22CP	1/2" (12mm)

### INSTALLATION STEPS

- 1** Drill holes on the stair surface.
- 2** Place the steel base plate **(A)** beneath main product.
- 3** Position the main product body and secure it with screws at point **(C)**.  
(Note: Screws must be purchased separately.)
- 4** To adjust the product angle, use a hex key to adjust the set screw **(B)**.  
(Adjustable range: 35–45 degrees.)
- 5** Tighten the screws at **(C)**.
- 6** Attach the cover plate **(D)**.
- 7** Install the gasket **(E)**.
- 8** Mount the glass and tighten the screws at **(F)**.

